



## METAL AND ANODISED ALUMINIUM MIRROR REFLECTOR FOR BATTEN FITTING

PBMR 240


PBMR 240A

PBAR 140


PBAR 140A



U Shape Reflector

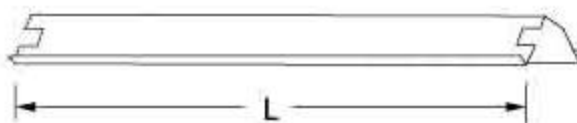


Angle Reflector

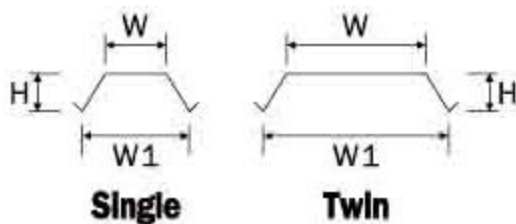

Single

Twin

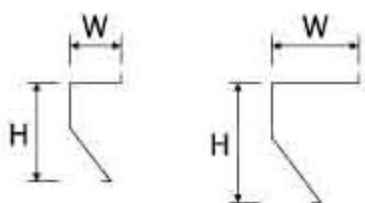

Single

Twin

### Features:

- Design for directional and effective illumination.
- Available in different angle of reflection.
- Easy installation with superior speed mounting system without using any specialize tool.
- Housing are made of 0.5mm high quality cold rolled sheet and treated with epoxy powder coated to give a smooth and attractive finishing.
- 0.5mm thickness metal reflector sheet or 0.4mm thickness mirror reflector sheet.
- Suitable for single and twin fluorecent batten fitting.
- Fitting can be supplied with emergency power pack (PP), electronic ballast (EB) or extra low loss magnetic ballast (6WLL).

### Application:

- School
- Condominium
- Warehouse
- Walkway
- Car Park
- Other general fitting



Emergency Power Pack

### Standard Complied:

- MS IEC 60598-2-1 : 1997
- MS IEC 60598-1 : 1997

MODEL		TYPE OF LAMPS & RATING	DIMENSION				UNCORRECTED POWER FACTOR
ALUMINIUM MIRROR REFLECTOR	METAL REFLECTOR		L	W	W1	H	
PBAR 120	PBMR 120/6WLL	T8 1 X 18W	610	53	126.5	36.8	0.29
PBAR 140	PBMR 140/6WLL	T8 1 X 36W	1218	53	126.5	39.6	0.40
PBAR 220	PBMR 220/6WLL	T8 2 X 18W	610	129	208.2	39.6	0.27
PBAR 240	PBMR 240/6WLL	T8 2 X 36W	1218	129	208.2	39.6	0.43
PBAR 120A	PBMR 120A/6WLL	T8 1 X 18W	610	52	-	97.0	0.29
PBAR 140A	PBMR 140A/6WLL	T8 1 X 36W	1218	52	-	97.0	0.40
PBAR 220A	PBMR 220A/6WLL	T8 2 X 18W	610	129	-	97.0	0.27
PBAR 240A	PBMR 240A/6WLL	T8 2 X 36W	1218	129	-	97.0	0.43