




DIAKON DIFFUSER FITTING

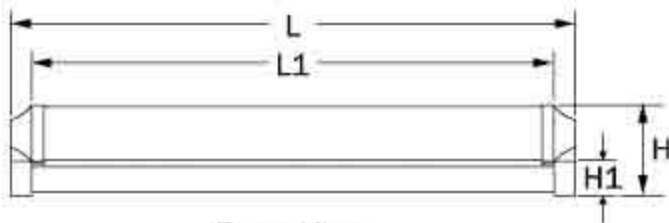


Front View

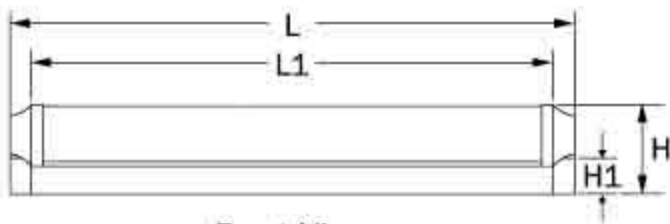

Front View



SINGLE



DOUBLE

Side View

Features:

- Attractive slim body design.
- Help reduce direct glare from the fluorescent tube.
- Easy installation with superior speed mounting system without using any specialized tool.
- Housing are made of 0.5mm high quality cold rolled sheet and treated with epoxy powder coated to give a smooth and attractive finishing.
- Fitting supplied with fire retardant PC lampholder.
- Various type of acrylic diffusers like opal diffuser, prismatic diffuser, shower diffuser & raindrop diffuser can be suitably fitted.
- Fitting can be supplied with emergency power pack (PP), electronic ballast (EB) or extra low loss magnetic ballast (6WLL).



Emergency Power Pack

Application:

- School
- Condominium
- Hotel
- Walkway
- Car Park
- Other general fitting

Standard Complied:

- MS IEC 60598-2-1 : 1997
- MS IEC 60598-1 : 1997



PS-12 Diffuser (PDP)



Opal Diffuser (PDO)



Shower Diffuser (PDS)



Raindrop Diffuser (PDR)

MODEL	LAMPS TYPE & RATING	DIMENSION						UNCORRECTED POWER FACTOR
		L	L1	H	H1	W	W1	
PDP 120/6WLL	T8 1 X 18W	626	580	99.5	38	66	54	0.29
PDP 140/6WLL	T8 1 X 36W	1235	1188	99.5	38	66	54	0.40
PDP 220/6WLL	T8 2 X 18W	626	580	99.5	39	128.5	57	0.27
PDP 240/6WLL	T8 2 X 36W	1235	1188	99.5	39	128.5	57	0.43
PDO 120/6WLL	T8 1 X 18W	626	580	99.5	38	66	54	0.29
PDO 140/6WLL	T8 1 X 36W	1235	1188	99.5	38	66	54	0.40
PDO 220/6WLL	T8 2 X 18W	626	580	99.5	39	128.5	57	0.27
PDO 240/6WLL	T8 2 X 36W	1235	1188	99.5	39	128.5	57	0.43
PDS 120/6WLL	T8 1 X 18W	626	580	99.5	38	66	54	0.29
PDS 140/6WLL	T8 1 X 36W	1235	1188	99.5	38	66	54	0.40
PDS 220/6WLL	T8 2 X 18W	626	580	99.5	39	128.5	57	0.27
PDS 240/6WLL	T8 2 X 36W	1235	1188	99.5	39	128.5	57	0.43
PDR 120/6WLL	T8 1 X 18W	626	580	99.5	38	66	54	0.29
PDR 140/6WLL	T8 1 X 36W	1235	1188	99.5	38	66	54	0.40
PDR 220/6WLL	T8 2 X 18W	626	580	99.5	39	128.5	57	0.27
PDR 240/6WLL	T8 2 X 36W	1235	1188	99.5	39	128.5	57	0.43