


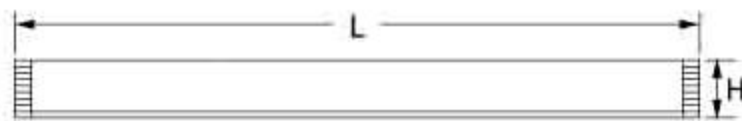


TRIANGLE DIAKON FITTING



MODEL : PTDM



MODEL : PTR & PTMR

Features:

- Designed to ensure a maximum wide area of lighting efficiency with a very low operating cost and maintenance.
- A choice of high quality anodized aluminium or epoxy powder coated metal reflector for maximum reflection of light.
- Easy installation with superior speed mounting system without using any specialized tool.
- Strong sheet steel housing that is stove enameled inside and outside.
- Housing are made of 0.5mm high quality cold rolled sheet and treated with epoxy powder coated to give a smooth and attractive finishing.
- Surface mounted either on wall or ceiling.
- Fitting can be supplied with emergency power pack (PP), electronic ballast (EB) or extra low loss magnetic ballast (6WLL).

Application:

- School
- Staircase
- Warehouse
- Walkway
- Corridor
- Car Park
- Other general fitting



Emergency Power Pack

Standard complied:

- MS IEC 60598-2-1 : 1997
- MS IEC 60598-1 : 1997

MODEL	LAMPS TYPE & RATING	DIMENSION			REFLECTOR	UNCORRECTED POWER FACTOR
		L	H	W		
PTR 220/6WLL	T8 2 X 18W	615	72	132	METAL / WHITE PAINT	0.27
PTR 240/6WLL	T8 2 X 36W	1220	72	132	METAL / WHITE PAINT	0.43
PTDM 220/6WLL	T8 2 X 18W	620	103	132	ALUMINIUM MIRROR / ACRYLIC DIFFUSER	0.27
PTDM 240/6WLL	T8 2 X 36W	1225	103	132	ALUMINIUM MIRROR / ACRYLIC DIFFUSER	0.43
PTMR 220/6WLL	T8 2 X 18W	615	72	132	ALUMINIUM MIRROR	0.27
PTMR 240/6WLL	T8 2 X 36W	1220	72	132	ALUMINIUM MIRROR	0.43