



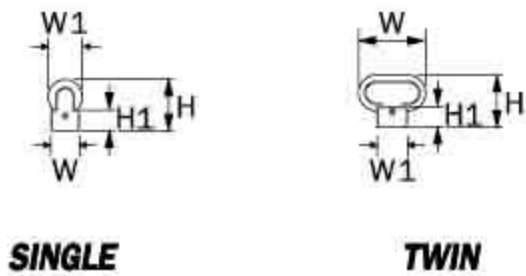

WIREGUARD FITTING (ECONOMIC TYPE)

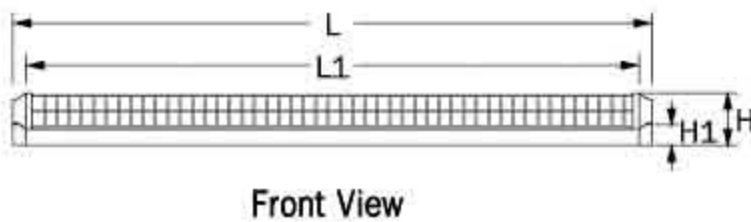

Side View

Features:

- Economic type fluorescent wireguard fitting.
- To prevent vandalism and breakage, hence less maintenance.
- Easy installation with superior speed mounting system without using any specialized tool.
- Housing are made of 0.5mm high quality cold rolled sheet and treated with epoxy powder coated to give a smooth and attractive finishing.
- Design for surface mounted on wall, either a horizontal or vertical position.
- Fitting can be supplied with emergency power pack (PP), electronic ballast (EB) or extra low loss magnetic ballast (6WLL).

Application:

- School
- Condominium
- Warehouse
- Walkway
- Car Park
- Other general fitting



Emergency Power Pack

Standard complied:

- MS IEC 60598-2-1 : 1997
- MS IEC 60598-1 : 1997

MODEL	LAMPS TYPE & RATING	DIMENSION						UNCORRECTED POWER FACTOR
		L	L1	H	H1	W	W1	
PCWG 120/6WLL	T8 1 X 18W	626	580	99.5	38	66	54	0.29
PCWG 140/6WLL	T8 1 X 36W	1235	1188	99.5	38	66	54	0.40
PCWG 220/6WLL	T8 2 X 18W	626	580	99.5	39	128.5	57	0.27
PCWG 240/6WLL	T8 2 X 36W	1235	1188	99.5	39	128.5	57	0.43