

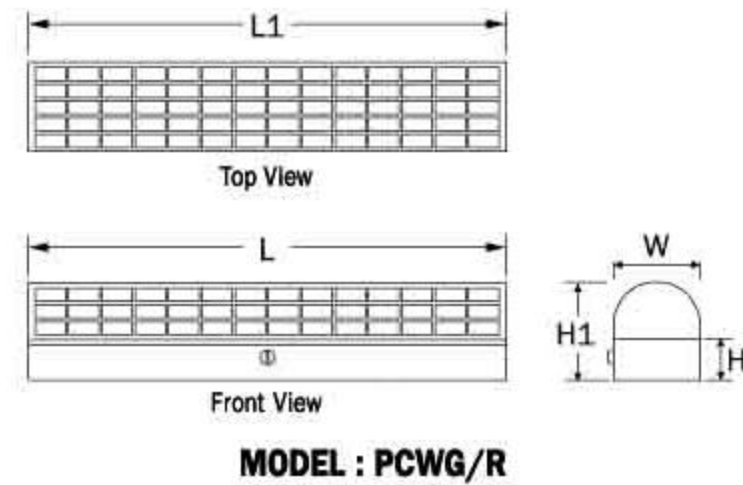


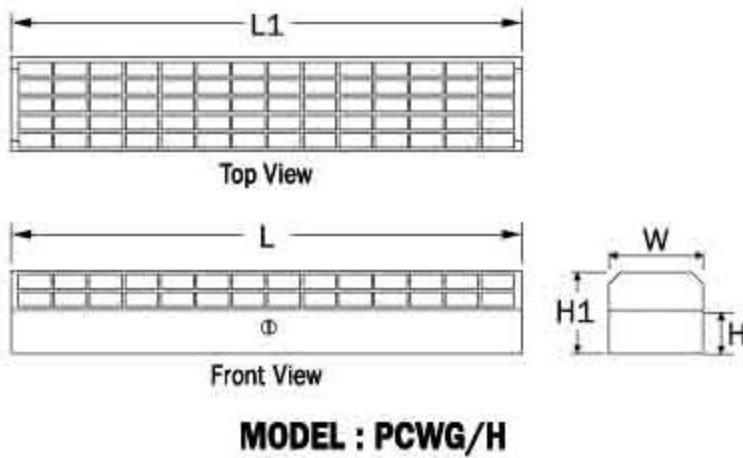

WIREGUARD FITTING (PADLOCK & KEYLOCK)

Strong And Sturdy For Longlasting Use

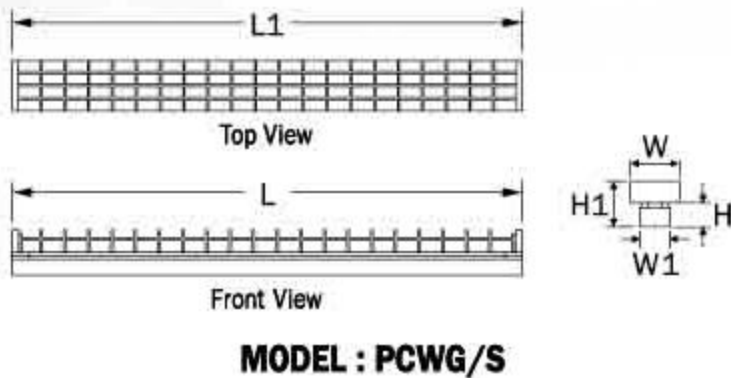

Features:

- Vandal resistance, hence less maintenance.
- Easy installation with superior speed mounting system without using any specialize tool.
- Strong sheet steel housing that is stove enameled inside and outside.
- Housing are made of 0.5mm high quality cold rolled sheet and treated with epoxy powder coated to give a smooth and attractive finishing.
- Design for surface mounted on wall, either a horizontal or vertical position.
- Choice of key lock or pad lock are available.
- Fitting can be supplied with emergency power pack (PP), electronic ballast (EB) or extra low loss magnetic ballast (6WLL).

Application:

- School
- Staircase
- Warehouse
- Walkway
- Corridor
- Car Park
- Other general fitting



Key Lock Type



Pad Lock Type



Emergency Power Pack

Standard Complied:

- MS IEC 598-2-1 : 1997
- MS IEC 598-1 : 1997
- EN 60598-2-1 : 1989

MODEL	LAMPS TYPE & RATING	DIMENSION						UNCORRECTED POWER FACTOR
		L	L1	W	W1	H	H1	
PCWG 120/R/6WLL	T8 1 X 18W	612	614	112	-	55	124	0.29
PCWG 140/R/6WLL	T8 1 X 36W	1222	1224	112	-	55	124	0.40
PCWG 220/R/6WLL	T8 2 X 18W	612	614	112	-	55	124	0.27
PCWG 240/R/6WLL	T8 2 X 36W	1222	1224	112	-	55	124	0.43
PCWG 320/R/6WLL	T8 3 X 18W	612	614	112	-	55	124	0.32
PCWG 340/R/6WLL	T8 3 X 36W	1222	1224	112	-	55	124	0.42
PCWG 120/H/6WLL	T8 1 X 18W	612	614	112	-	55	96	0.29
PCWG 140/H/6WLL	T8 1 X 36W	1222	1224	112	-	55	96	0.40
PCWG 220/H/6WLL	T8 2 X 18W	612	614	112	-	55	96	0.27
PCWG 240/H/6WLL	T8 2 X 36W	1222	1224	112	-	55	96	0.43
PCWG 320/H/6WLL	T8 3 X 18W	612	614	112	-	55	96	0.32
PCWG 340/H/6WLL	T8 3 X 36W	1222	1224	112	-	55	96	0.42
PCWG 120/S/6WLL	T8 1 X 18W	612	614	88	51	42	81	0.29
PCWG 140/S/6WLL	T8 1 X 36W	1220	1224	88	51	42	81	0.40