

VANDAL PROOF FITTING



Features:

- The fixture is designed to be sturdy and high impact resistance suitable for detention and security areas.
- Housing- Heavy gauge 1.2mm thickness cold rolled steel casing epoxy powder coated finishing.
- Lens-Unbreakable 6mm thickness clear polycarbonate enhanced lens.
- Fastener-Specials TROX head screw to secure the fixtures.
- Reflectors-High gloss parabolic reflector to provide maximum output.
- Fitting can be supplied with emergency power pack (PP), electronic ballast (EB) or extra low loss magnetic ballast (6WLL).

Application:


- Prison
- Chemical Lab & etc

Standard Complied:

- IMPACT TEST @ 270 JOULES



Emergency Power Pack

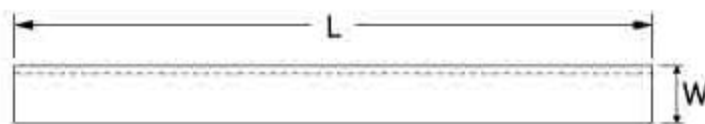

Front View



Side View



Tempered proof clear lens



Specials TORX head screw

MODEL	TYPE OF LAMPS & RATING	DIMENSION			UNCORRECTED POWER FACTOR
		L	W	H	
PCO 2FP/6WLL	T8 1 X 18W	650	170	85	0.29
PCO 4FP/6WLL	T8 1 X 36W	1250	170	85	0.40
PCO 22FP/6WLL	T8 2 X 18W	650	170	85	0.27
PCO 24FP/6WLL	T8 2 X 36W	1250	170	85	0.43