




FLUORESCENT MIRROR

## GENERAL USE LUMINAIRE MIRROR REFLECTOR LUMINAIRE

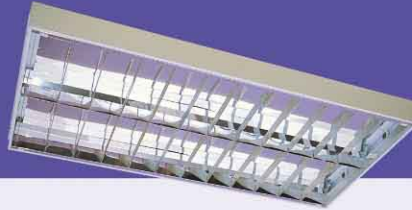

### Features:

- Strong sheet steel housing that is stove enameled inside and outside.
- Designed for recessed, surface or woodceiling mounting.
- Available in imperial size and metric size.
- Anodised aluminium reflector perform better light distribution.
- Easy installation with superior speed mounting system without using any specialize tool.
- Housing are made with 0.5mm high quality cold rolled sheet and treated with epoxy powder coated to give a smooth and attractive finishing.
- Laminated aluminium reflector are available on request.
- **GEAR OPTIONAL:**  
Fitting can be supplied with:
  - (a) 6WLL - Extra Low Loss Ballast
  - (b) EB - Electronic Ballast
  - (c) DEB - Dimmable Electronic Ballast
  - (d) PP - Emergency Power Pack

### Application:

- School
- Condominium
- Walkway
- Hall
- Other general fitting

### Standard Complied:

- MS IEC 60598-2 : 1998
- MS IEC 598-1 : 1997



Recessed Mounting



Surface Mounting




Woodceiling Mounting



Emergency Power Pack




## GENERAL USE LUMINAIRE MIRROR REFLECTOR LUMINAIRE (RECESSED MOUNTING - DRAWING & DIMENSION)



### RECESSED MOUNTING (IMPERIAL SIZE)

| MODEL            | LAMPS TYPE & RATING | DIMENSION |      |     |    |    | CROSS BLADES QTY |
|------------------|---------------------|-----------|------|-----|----|----|------------------|
|                  |                     | L         | L1   | W   | H  | H1 |                  |
| PLML 220/R/6WLL  | T8 2 X 18W          | 604       | 612  | 604 | 70 | 39 | 6                |
| PLML 240/R/6WLL  | T8 2 X 36W          | 1214      | 1222 | 604 | 70 | 39 | 11               |
| PLML 320/R/6WLL  | T8 3 X 18W          | 604       | 612  | 604 | 70 | 39 | 6                |
| PLML 340/R/6WLL  | T8 3 X 36W          | 1214      | 1222 | 604 | 70 | 39 | 11               |
| PLML 420/R/6WLL  | T8 4 X 18W          | 604       | 612  | 604 | 94 | 57 | 7                |
| PLML 440/R/6WLL  | T8 4 X 36W          | 1214      | 1222 | 604 | 94 | 57 | 13               |
| PLML 120S/R/6WLL | T8 1 X 18W          | 604       | 612  | 295 | 94 | 57 | 7                |
| PLML 220S/R/6WLL | T8 2 X 18W          | 604       | 612  | 295 | 94 | 57 | 7                |
| PLML 140S/R/6WLL | T8 1 X 36W          | 1214      | 1222 | 295 | 94 | 57 | 13               |
| PLML 240S/R/6WLL | T8 2 X 36W          | 1214      | 1222 | 295 | 94 | 57 | 13               |



### RECESSED MOUNTING (METRIC/MM SIZE)

| MODEL               | LAMPS TYPE & RATING | DIMENSION |      |     |    |    | CROSS BLADES QTY |
|---------------------|---------------------|-----------|------|-----|----|----|------------------|
|                     |                     | L         | L1   | W   | H  | H1 |                  |
| PLML 220/R/MM/6WLL  | T8 2 X 18W          | 595       | 624  | 595 | 70 | 39 | 6                |
| PLML 240/R/MM/6WLL  | T8 2 X 36W          | 1195      | 1222 | 595 | 70 | 39 | 11               |
| PLML 320/R/MM/6WLL  | T8 3 X 18W          | 595       | 624  | 595 | 70 | 39 | 6                |
| PLML 340/R/MM/6WLL  | T8 3 X 36W          | 1195      | 1222 | 595 | 70 | 39 | 11               |
| PLML 420/R/MM/6WLL  | T8 4 X 18W          | 595       | 624  | 595 | 94 | 57 | 7                |
| PLML 440/R/MM/6WLL  | T8 4 X 36W          | 1195      | 1222 | 595 | 94 | 57 | 13               |
| PLML 120S/R/MM/6WLL | T8 1 X 18W          | 595       | 624  | 295 | 94 | 57 | 7                |
| PLML 220S/R/MM/6WLL | T8 2 X 18W          | 595       | 624  | 295 | 94 | 57 | 7                |
| PLML 140S/R/MM/6WLL | T8 1 X 36W          | 1195      | 1222 | 295 | 94 | 57 | 13               |
| PLML 240S/R/MM/6WLL | T8 2 X 36W          | 1195      | 1222 | 295 | 94 | 57 | 13               |

